




PATENT
ATTORNEY DOCKET NO.: 046601-5056



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Commissioner for Patents
BOX PATENT APPLICATION
Washington, D.C. 20231

**TRANSMITTAL FOR A NEWLY EXECUTED ORIGINAL APPLICATION
UNDER 37 C.F.R. §1.53(b)**

This is a request for filing a patent application under 37 C.F.R. §1.53(b) for:

Inventor: Hiroyuki SAYUDA

For: IMAGE PROCESSING APPARATUS AND IMAGE FORMING MEDIUM

1. This is a new ☒ **Utility** ☐ **Design** ☐ **Plant** patent application.
2. The papers enclosed to obtain a filing date are as follows:
 - 31 Pages of Specification including
 - 0 Title Page
 - 1 Page of Claims
 - 1 Page of Abstract
 - 19 Sheets of drawings containing 25 Figures
 - ☐ The enclosed drawing(s) are photograph(s), and there is also attached a PETITION TO ACCEPT PHOTOGRAPH(S) AS DRAWING(S)
3. Combined Declaration and Power of Attorney
 - ☒ Enclosed and is executed by all inventors.
 - ☐ Not Enclosed.

This application is being filed under the provisions of 37 C.F.R. §1.53(f).
Applicant(s) await notification from the Patent and Trademark Office of the time set for filing the Declaration and paying the filing fees.

4. Language

☒ English☐ Non-English

This application is being filed in accordance with 37 C.F.R. §1.52(d) and §608.01 of the MPEP. Applicant(s) await notification from the Patent and Trademark Office of the time set for filing the verified English translation and the processing fee.

5. Assignment

☒ An assignment of the invention to FUJI XEROX CO., LTD. and a PTO Form-1595, Recordation Form Cover Sheet, are enclosed.

☐ An assignment will be filed at a later date.

6. Priority - foreign applications under 35 U.S.C. §119(a)-(d) or §365(b) or PCT international applications under 35 U.S.C. §365(a) designating at least one country other than the U.S.

☒ Priority of the following foreign application is claimed:

Country	Application No.	Filed
Japan	11-356024	December 15, 1999

Certified copy: ☒ is attached. ☐ will follow.

7. Priority based on provisional application(s) - 35 U.S.C. §119(e)

☐ Priority of the following provisional application(s) is claimed:

Application No.	Filed

A. Relate Back - 35 U.S.C. §119(e)

- ☐ Amend the specification by inserting before the first line the sentence:
 "This application claims priority of copending provisional application(s)
 No. _____ filed on _____."

8. Small entity status

- ☐ A statement claiming small entity status under 37 C.F.R. §§1.9 and 1.27 is enclosed.

9. Fee Calculation (37 C.F.R. §1.16)

CLAIMS FOR FEE CALCULATION				
	Number Filed	Number Extra	at Rate of	Basic Fee Utility \$690.00 Design \$310.00
Total Claims (37 C.F.R. §1.16(c))	7 - 20 =		\$ 18.00 each=	\$0.00
Independent Claims (37 C.F.R. §1.16(b))	2 - 3 =		\$ 78.00 each=	\$0.00
Multiple dependent claim(s), if any (37 C.F.R. §1.16(d))			\$260.00	+
SUB-TOTAL =				\$690.00
Reduction by 1/2 for filing by a small entity				- \$
TOTAL FILING FEE =				\$690.00

10. Fee Payment

- ☐ Not Enclosed. **NO FEE IS BEING PAID BY CHECK OR DEPOSIT ACCOUNT AT THIS TIME.**
 This application is being filed under the provisions of 37 C.F.R. §1.53(f).
 Applicant(s) await notification from the Patent and Trademark Office of the time set for filing the Declaration and paying the filing fees.

[X] Enclosed.

Two checks in the amounts of \$ 690.00 and \$40.00 representing the basic filing fee of \$690.00 and an assignment recording fee of \$40.00 are enclosed.

11. [X] **Except** for issue fees payable under 37 C.F.R. §1.18, the Commissioner is hereby authorized by this paper to charge any additional fees during the entire pendency of this application including fees due under 37 C.F.R. §§1.16 and 1.17 which may be required, including any required extension of time fees, or credit any overpayment to Deposit Account 50-0310. This paragraph is intended to be a **CONSTRUCTIVE PETITION FOR EXTENSION OF TIME** in accordance with 37 C.F.R. §1.136(a)(3).


12. Additional papers enclosed:

- ☐ Preliminary Amendment
- ☒ Information Disclosure Statement
- ☒ Form PTO-1449, 4 documents included
- ☐ Declaration of Biological Deposit
- ☐ Submission of "Sequence Listing", computer readable copy and/or amendment pertaining thereto for biotechnology invention containing nucleotide and/or amino acid sequence.

Please accord this application an application number and filing date.

Respectfully submitted,

MORGAN, LEWIS & BOCKIUS LLP



J. Michael Thesz
Reg. No. 40,354

Dated: July 31, 2000

Customer No. 009629
MORGAN, LEWIS & BOCKIUS LLP
1800 M Street, N.W.
Washington, D.C. 20036
(202) 467-7000

IMAGE PROCESSING APPARATUS AND IMAGE FORMING MEDIUM

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to an image processing apparatus that outputs, as an image, document data containing information for accessing related information, such as hyper document data written in, e.g., HTML (Hyper Text Markup Language), embedding information for specifying the related information, and an image forming medium onto which the image has been outputted.

2. Description of the Prior Art

In recent years, with widespread use of computers, many documents are electronically generated. Particularly, because of the evolution of network technologies as typified by the Internet, many electronic documents take a form called hyper documents that have links for associating information (hereinafter referred to as related information) such as related texts, image elements, sound, and video with image elements constituting the texts, such as text bodies, pictures, and graphics. For example, in electronic documents written in HTML, which is a sort of hyper document, a link is implemented by describing URL (Uniform Resource Locator) indicating the location of related information. Such hyper documents can be generally browsed by information browsing software called a browser. Furthermore, by pointing to image elements constituting the documents with an indicator called a mouse, related information of the image elements can be quickly browsed or reproduced.

By the way, the hyper documents may be printed out on recording media such as paper in almost the same appearance in which they are

browsed by a browser, by common printers of the ink-jet system, electrophotography (xerography system), and the like. Since such printout on paper is superior in visibility and transportability than output onto electronic display media such as a display, it is widely being used in offices in general and homes.

However, hyper documents simply printed out have a problem in that, since only visible information of information contained in the hyper documents is recorded and information about links and the like is not outputted directly on paper, the characteristics (properties) of the hyper documents are lost, with the result of reduced usability. To be more specific, to gain access to related information, the user must take the trouble to leave the printed documents, browse electronic hyper documents, search for a corresponding image element, and point to it with a mouse.

Therefore, to solve such a problem, there are conventionally proposed technologies by which hyper document is printed out with link information embedded on paper so that access to related electronic information from the paper document is enabled.

There is disclosed in, e.g., Japanese Published Unexamined Patent Application No. Hei 10-228468 a system that embeds coupling information for associating written information such as text bodies and graphics having links with pertinent linked related information in proper areas of the document in the form of two-dimensional codes and prints out the document. According to the system, when accessing the linked related information, the user marks the corresponding written information with a marking pen and lets a scanner scan it. By analyzing the scanned image and specifying the selected written information, the system makes access to corresponding link information.

There is also disclosed in, e.g., Japanese Published Unexamined Patent Application No. Hei 10-289239 a system having a part that provides selection disabling information for judging whether marking points are valid, added to the above-described system.

There is further disclosed in, e.g., Japanese Published Unexamined Patent Application No. Hei 11-203381 a system that converts a URL in HTML document into an image represented as two-dimensional codes and prints out the document, inserting the image immediately after a reference portion (a portion of the URL). According to the system, when accessing linked related information, the user scans in an image portion represented as two-dimensional codes with a camera. By analyzing the two-dimensional codes and converting them into a URL, the system makes access to the related information.

However, although the conventionally proposed technologies eliminate the trouble to temporarily leave paper documents to access related information and browse electronic hyperdocument documents, problems as described below might arise.

The system disclosed in, e.g., Japanese Published Unexamined Patent Application No. Hei 10-228468 has the drawbacks that: 1) a paper document is smudged because of marking with a marking pen or the like; 2) a paper document once having been marked cannot be used again; and 3) scanning in the entire paper document by a scanner to analyze marked written information and coupling information of two-dimensional code requires much time for the scanning and analysis, disabling a quick access to linked information.

Although the system disclosed in, e.g., Japanese Published Unexamined Patent Application No. Hei 11-289239 solves the above-

described drawback 2) by providing selection disabling information to enable the use of an identical paper document a plural number of times, the drawbacks 1) and 3) are not solved.

The system disclosed in, e.g., Japanese Published Unexamined Patent Application No. Hei 11-203381 is free from the above-described drawbacks 1) to 3) but has the drawback that the insertion of an image represented as two-dimensional codes collapses the appearance (plotting positions of image elements) of the original HTML document, so it cannot apply to documents important in appearance. Particularly, where plural URLs are embedded in different points of one picture, such as functions called clickable maps, application of the system is difficult. This is because a collapsed appearance would make it impossible for the user to determine which two-dimensional code corresponds to a URL to be referenced.

In other words, there exists a problem in that, although various technologies are proposed to print a hyper document, embedding information about links contained therein on paper and enable access to electronic related information from the paper document, the conventional technologies of scanning the entire document for analysis require much time for access to related information or limits applicable hyper documents to maintain appearances.

SUMMARY OF THE INVENTION

The present invention has been made in view of the above circumstances and provides an image processing apparatus and an image forming medium that, for any hyper document, embeds information for accessing related information in corresponding image elements without

collapsing the appearance and enables a quick access to the related information.

The present invention provides an image processing apparatus, including: an input part that inputs document data and coupling information for specifying related information related to an image element constituting a document image; and an embedding part that embeds the coupling information to be superimposed over at least part of the image element to form the document image of the document data inputted by the input part.

According to the image processing apparatus configured as described above, since coupling information for specifying related information is embedded to be superimposed over at least part of the image element, the appearance of the image is not collapsed because of the coupling information or the amount of collapse is minimized. Therefore, if the image processing apparatus is used, by scanning only the image element or its vicinity for analysis, related information related to the image element can be accessed.

The present invention also provides an image forming medium on which an image constituted of image elements is formed, wherein coupling information for specifying related information related to the image elements is superimposed over at least part of the image elements.

According to the image forming medium configured as described above, since an image is formed in such a way that coupling information for specifying related information related to an image element is superimposed over at least part of the image element, the appearance of the image element in the image formation position does not collapse, and by scanning, for example, only the image element or its vicinity for analysis, related information related to the image element can be accessed. Thus, if the

image forming medium is used, the user can instantly access related information with an operation sense similar to directions by a mouse by using, e.g., a small-size scanner.

BRIEF DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the present invention will be described in detail based on the followings, wherein:

FIG. 1 is a block diagram showing the configuration of major parts of an image processing apparatus according to a first embodiment of the present invention;

FIG. 2 illustrates concrete examples of image forming media onto which hyper document is printed out, FIG. 2A shows an example of an image forming medium according to the present invention, and FIG. 2B shows an example of a conventional image forming medium;

FIG. 3 is a flowchart giving the outline of the procedure for printing hyper document in the first embodiment of the present invention;

FIG. 4 illustrates concrete examples of link information contained in data, FIG. 4A shows an example of link information of relative path expression, and FIG. 4B shows an example of link information of absolute path expression;

FIG. 5 is a block diagram showing an example of an information embedding image formation unit in the first embodiment of the present invention;

FIG. 6 illustrates an example of information embedding processing in the first embodiment of the present invention;

FIG. 7 illustrates part of an information embedded image plotted in the first embodiment of the present invention;

embodiment of the present invention;

FIG. 19 is a schematic diagram of a system for accessing linked related information from an image forming medium according to the present invention;

FIG. 20 is a flowchart giving the outline of processing operations during access to linked related information from an image forming medium according to the first or third embodiment of the present invention; and

FIG. 21 is a flowchart giving the outline of processing operations during access to linked related information from an image forming medium according to the second embodiment of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Hereinafter, an image processing apparatus and an image forming medium according to the present invention will be described based on the accompanying drawings.

[First embodiment]

FIG. 1 is a block diagram showing the configuration of major parts of an image processing apparatus according to a first embodiment of the present invention. Used as image processing apparatuses of the present embodiment are a computer as a host apparatus connected to a printer, the printer, and the like. Specifically, on receiving document data written in, e.g., HTML, the image processing apparatus of the present embodiment performs processing required to print it out as a hyper document on a recording medium such as paper, or prints it out. For printout, the prior arts such as electrophotography, the ink-jet system, and the like may be used. Conceivable as input of data to the image processing apparatus are input of image data and print description languages from a host

apparatus, input of image data via the Internet, and entry of data from a keyboard.

Document data received by the image processing apparatus is assumed to include appearance information to define the plotting positions of image elements such as text bodies, pictures, and graphics on a hyper document. Although the appearance information basically defines the appearance of the hyper document, some hyper documents describe only logical semantics of individual image elements such as, e.g., paragraphs without definitely defining appearances. Usually, for such a hyper document, a browser or an image processing apparatus converts logical information into appearance information according to predetermined rules and displays or prints it. That is, in this case, the appearance of image elements is determined based on the logical information. Accordingly, in this specification, document data having only the logical information will also be assumed to contain information to define appearances.

Document data received by the image processing apparatus is assumed to contain link information for accessing related information. The link information is used to associate image elements plotted on a hyper document with information related to them. For example, if document data is written in HTML, link information is represented by URL, which indicates a place in which related information is stored.

To print out such document data as a hyper document, the image processing apparatus has a plotting control unit 10, which generates output data for printout. More specifically, the plotting control unit 10, to generate the output data, has an image data generation unit 11, an embedding control data generation unit 12, and an information embedding image formation unit 13.

001E6C074962960

The image data generation unit 11, based on appearance information contained in the received document data, generates image data to be plotted, that is, image data necessary for printing out the document data as a hyper document.

The embedding control data generation unit 12 generates control data necessary for embedding information (thereinafter referred to as coupling information) for specifying related information from link information contained in the received document data in the hyper document, that is, embedding control data for controlling the information embedding image formation unit 13.

The information embedding image formation unit 13 generates output data (pixel data) to be printed out on a recording medium, based on the image data generated by the image data generation unit 11 and the embedding control data generated by the embedding control data generation unit 12.

The plotting control unit 10 having the image data generation unit 11, the embedding control data generation unit 12, and the information embedding image formation unit 13 may be embodied by a combination of, e.g., a CPU (Central Processing Unit) for executing a proper program, a ROM (Read Only Memory) for storing the program, and a RAM (Random Access Memory) used as a work area of the CPU.

FIG. 2A shows a concrete example of output data generated by the plotting control unit 10, outputted as a document image on a recording medium. FIG. 2A shows an example of printing out document data written in HTML by the image processing apparatus of the present embodiment. For comparison, FIG. 2B shows a concrete example of printing out the identical HTML document data based on the appearance

information by a conventional image processing apparatus. In comparison of the examples, although appearances such as layout are nearly identical between the two, the configuration of pixels plotted in areas 21, 22, and 23 shown in FIG. 2A are microscopically different from that in ordinary plotting areas. That is, in these areas 21, 22, and 23, as will be described in detail later, coupling information related to image elements viewed in the vicinity of the areas is embedded.

Here is a brief description of the operation of a thus configured image processing device for printing out document data as a hyper document. FIG. 3 is a flowchart giving the outline of the procedure for printing a hyper document.

To perform printing, the image processing apparatus first obtains the entity of the hyper document to be printed, that is, the document data from which to generate the hyper document, from the outside of the apparatus (step 101, thereafter steps will be simply referred to as "S").

Upon acquisition of the document data, the image data generation unit 11 generates image data from the document data, based on appearance information contained in the document data (S102). The embedding control data generation unit 12 extracts link information contained in the document data, obtains the plotting position of an image element corresponding to it from the appearance information (S103), and generates embedding control data for the information embedding image formation unit 13 from the extracted link information (S104).

Finally, as will be described in detail later, the information embedding image formation unit 13 generates pixel data in which the coupling information has been embedded, based on the image data generated by the image data generation unit 11 and the embedding control

data generated by the embedding control data generation unit 12, and forms an image by the pixel data in a printer engine not shown or the like (S105).

FIGS. 4A and 4B are drawings for explaining in more detail the processing of the above-described S103 and S104. The example shows the upper-left coordinates (xy coordinates) of image elements (corresponding to the areas 21, 22, and 23) in which related information exists on the HTML document shown in FIG. 2A, and link information corresponding to the related information. Since the document data received by the image processing apparatus contains the upper-left coordinates and link information as shown in the drawings, the embedding control data generation unit 12 performs the above-described S103 processing based on them.

The link information includes relative positional representation (relative path) and absolute positional representation (absolute path), and usually includes relative path representation as shown in the first and third lines of data of FIG. 4A. A relative path additionally requires reference positional information to access related information. For example, the HTML document shown in FIG. 2A has positional information of "http://www.fujixerox.co.jp/."

For this reason, the embedding control data generation unit 12, before performing the above-described S104 processing, changes all pieces of the link information to absolute path representation as shown in FIG. 4B, to eliminate the need to obtain reference positional data for accessing related information and individually associate each of pieces of the link information with one image element. In other words, to specify related information itself, the link information is changed to absolute path representation. Although link information may be relative path

representation, in that case, the reference positional information "http://www.fujixerox.co.jp/" must be embedded in a proper area on the HTML document.

The embedding control data generation unit 12 generates embedding control data for the information embedding image formation unit 13 from the link information. Specifically, the embedding control data generation unit 12 converts the link information as text data into digital codes represented by a code value "0" or "1" and uses them as embedding control data. Accordingly, the embedding control data is basically generated from the above-described code values (the embedding control data contains other control information also).

Next, referring to FIGS. 5 to 10, a detailed description will be made of the above-described S105 processing and the information embedding image formation unit 13 that performs the processing. FIG. 5 is a block diagram showing an example of the information embedding image formation unit 13. The information embedding image formation unit 13 has: a concentration changer 13a; a D/A converter 13b; a triangular wave oscillator 13c; a selection circuit 13d; a triangular wave selection signal creator 13e; and a comparator 13f. Portions after a laser driving signal outputted from the comparator 13f are not described in detail here because the well-known electrophotography is used.

The concentration changer 13a recognizes the concentration value of image data from the image data generation unit 11 and increases or decreases the concentration in accordance with the concentration value and embedding control data. The D/A converter 13b converts the inputted image data (digital concentration information) into an analog voltage and outputs it to one input terminal of the comparator 13f. The triangular

oscillator 13c generates triangular waves 32 and 33 for creating a line screen as a basic element of an embedding area, and triangular waves 32 and 33 having a cycle double that of the triangular wave 31. The selection circuit 13d selects any of the generated triangular waves 31, 32, and 33, and outputs it to another input terminal of the comparator 13f. The triangular wave selection signal creator 13e sends a selection signal based on the embedding control data and controls selection processing by the selection circuit 13d. The comparator 13f compares the analog voltage of the input image and the level (analog voltage) of the triangular waves, and when the level of the triangular waves is greater than the analog voltage of the input image, outputs "H" (turns a laser ON); when smaller, outputs "L" (turns the laser OFF). A portion after the laser driving signal plots pixels on a recording medium in response to the laser ON command.

FIG. 6 is a drawing for explaining that four bits of code values 0, 1, 1, and 0 are embedded in proper portions 41, 42, 43, and 44 at a given interval in the area of image data of BF (hexadecimal number). The image data is represented by hexadecimal numbers "0" to "FF"; greater values denote higher image concentration. In this example, the image data is all "BF", denoting approximately 75%.

The embedding control data is basically generated from the code values of embedded data; the portion (two consecutive pixels) in which the code value "0" is embedded is "0" "D", and the portion (two consecutive pixels) in which the code value "1" is embedded is "1" "D". Other embedding control data is "B", denoting a blank.

Triangular wave selection signals are generated from embedding control data and the timing in which the data appears. When embedding control data is "B", "0", and "0", followed by "D", the signal "0" for

selecting a triangular wave 31 is generated. When embedding control data is "1" and "1", followed by "D", either of the signal "1" or "2" for selecting a triangular wave 32 or 33 is generated when the triangular wave becomes upward convex.

As seen from the above description, in the portions in which the code value "1" is embedded, two pixels are coupled to plot a large pixel such as a pixel 45, and in other portions, small pixels such as a pixel 46 are plotted.

FIG. 7 shows lines on which no code value is embedded, plotted above and below the scan lines on which the code values of link information described in FIG. 6 are embedded (the image data is all "BF"). The image is basically plotted with a line screen generated by the triangular wave 31; for example, provided that the number of lines is about 200 (about 200 lines per inch), the portion 47 in which the code value "1" is embedded is switched to about 100 lines' worth of screen.

Where the image concentration at the portion in which a specific code is embedded is lower or higher than a predetermined value, the concentration is changed by the concentration changer 13a. FIG. 8 is a drawing for explaining that four bits of code values "0", "1", "1", and "0" are embedded at a given interval in the area of image data of 0D (hexadecimal number; image concentration of approximately 5%). If the image data of the portion in which the code value "1" is embedded is lower than a predetermined lower limit "33" (image concentration of approximately 20%), it is increased to "33" by the concentration changer 13a. FIG. 9 is a drawing for explaining that four bits of code values "0", "1", "1", and "0" are embedded at a given interval in the area of image data of E6 (hexadecimal number; image concentration of approximately 90%).

If the image data of the portion in which the code value "1" is embedded is higher than a predetermined upper limit "CC" (image concentration of approximately 80%), it is decreased to "CC" by the concentration changer 13a. In this way, by limiting the portions in which the code value "1" is embedded, to middle concentrations of approximately 20 to 80%, the portions in which the code value "1" is embedded can be specified from the output waveforms of charge coupled devices (hereinafter referred to as CCD) of an image scanner.

FIG. 10 shows an example that code values are embedded in an area 48 within an image having a concentration of approximately 75%. In this example, the code values "1"s for identifying the position of the area 48 are embedded in the fast-scanning direction (area 49 in the figure) and code values of 36 bits (4 bits in the fast-scanning direction (9 lines in the slow-scanning direction) are embedded in the area 48.

The size of an embedding area is determined by the amount of codes to be embedded. In the examples of the areas 21, 22, and 23 shown in FIG. 2A, the height of the slow-scanning direction is fixed and the length of the fast-scanning direction is variable depending on the amount of codes.

In this way, the information embedding image formation unit 13 embeds the link information converted into digital codes in the plotting positions of corresponding image elements as coupling information for specifying related information. Specifically, at the upper-left area of the plotting position of an image element, coupling information corresponding to the image element is embedded to be superimposed thereon and the image element can be viewed. The image data in which the coupling information has been embedded is used as output data for printout onto a recording medium. Accordingly, if the output data is outputted onto a

recording medium as a hyper document image, the HTML document as shown in FIG. 2A is obtained.

As has been described above, in the image processing apparatus of the present embodiment, an image element making up a hyper document is plotted in accordance with an appearance defined by appearance information, and coupling information for specifying related information related to the image element is embedded in the plotting position of the image element to be superimposed over at least part of the element. In the present embodiment, in a recording medium onto which a hyper document is printed out, image elements are plotted in plotting positions defined by appearance information, and coupling information for specifying related information of the image elements is also plotted in the plotting position of the image elements to be superimposed over at least part of the image elements.

Therefore, according to the image processing apparatus of the present embodiment or a recording medium outputted from the image processing apparatus, for example, by scanning and analyzing only image elements on the outputted hyper document or areas in the vicinity of them, without the need to take the trouble to temporarily leave the hyper document on the medium and browse an electronic hyper document, access to related information related to the image elements could be instantly gained with an operation sense similar to directions by a mouse by using, e.g., a small-size scanner. Moreover, in this case, the user has only to scan only a desired image element or areas in the vicinity of it without the need to scan and analyze the entire hyper document, so that he can gain instant access to related information. Since the printed hyper document never collapses in its original appearance, the present invention is

applicable to any hyper document and provides excellent visibility to users. Moreover, since the appearance of the hyper document does not collapse, if coupling information is embedded, e.g., in the upper-left area of image elements and the rule (the existence of the coupling information in the upper-left position) is announced to users, the users can easily recognize where to scan on the hyper document, so that they can easily access related information.

In the image processing apparatus of the present embodiment, as coupling information embedded to be superimposed over image elements, link information indicative of the location of related information, more specifically, e.g., URL, is plotted in the form of digital codes. Accordingly, by analyzing (decoding) the related information, the related information can be correctly accessed. If the coupling information is embedded based on link information of absolute path representation, related information can be accessed more quickly. Moreover, if the embedding position of coupling information converted into digital codes is made visible, the users can gain access to related information more easily.

[Second embodiment]

Next, an image processing apparatus and an image forming medium in a second embodiment of the present invention will be described.

FIG. 11 is a block diagram showing the configuration of major parts of an image processing apparatus according to a second embodiment of the present invention. In FIG. 11, components identical to those in the first embodiment are identified by the same reference numbers. The image processing apparatus of the present embodiment has a link ID generation management unit 14, in addition to the parts shown in FIG. 1. The link ID generation management unit 14 may be provided outside the

image processing apparatus.

The link ID generation management unit 14 generates an ID (identification) for each of pieces of link information contained in received document data, and manages correspondences between the IDs and pieces of the link information. Hereinafter, the ID will be referred to as a "link ID".

Here is a brief description of the operation of a thus configured image processing device for printing out document data as a hyper document. FIG. 12 is a flowchart giving the outline of the procedure for printing a hyper document.

To perform printing, the image processing apparatus first obtains the entity of the hyper document to be printed (S201), and the image data generation unit 11 generates image data from appearance information (S202). The embedding control data generation unit 12 extracts link information and obtains the plotting position of an image element corresponding to it from the appearance information (S203).

The embedding control data generation unit 12 registers the extracted link information in the link ID generation management unit 14 and obtains a corresponding link ID from the link ID generation management unit 14 (S204). Embedding control data is generated from the link ID obtained by the embedding control data generation unit 12 (S205). The information embedding image formation unit 13 performs processing necessary for forming an image, based on the embedding control data (S206).

FIGS. 13A and 13C are drawings for explaining in more detail the processing of the above-described S203 and S204. In S203, as shown in FIG. 13A, the correspondence between the upper-left coordinates of the image element containing the link information and link information

associated with them is extracted. In S204, the link information of relative path representation is converted into absolute path representation, which is registered in the link ID generation management unit 14 to obtain a corresponding link ID. The link ID generation management unit 14 manages correspondences between link IDs and pieces of link information, as shown in FIG. 13B.

In the example of FIG. 13B, a link ID has 12 bytes - the first four bytes containing an identification number of the link ID generation management unit 14, the next four bytes containing a link information registration date, and the last four bytes containing an issuance serial number at each date (approximately 4.2 billions). Accordingly, there is no limit on the number of pieces of link information that can be substantially managed.

Although subsequent image formation is performed in the same way as in the first embodiment, data embedded in each area is the digital code equivalent of a link ID as shown in FIG. 13C. Consequently, coupling information, which is data embedded, was variable in length in the first embodiment, but has a fixed length of 12 bytes in the present embodiment.

Accordingly, as in the image processing apparatus of the present embodiment, by creating a link ID individually corresponding to each piece of link information and managing the correspondence between the link ID and the piece of link information in the link ID generation management unit 14, for example, as shown in FIG. 14, necessary coupling information could be embedded in areas 51, 52, and 53 smaller than the areas 21, 22, and 23 of FIG. 3.

Specifically, since the image processing apparatus of the present

embodiment embeds coupling information based on a link ID, which is identification information indicative of the location of related information, to be superimposed over an image element, the necessary coupling information can be embedded in a smaller area. Hence, the image processing apparatus of the present embodiment provides the same effect as the first embodiment and yet is very suitable for maintaining the appearance of a hyper document.

The link ID generation management unit 14 is used to gain access to linked related information; details will be given later.

Although, in the above-described first and second embodiments, the examples were described which coupling information is embedded in a manner that embeds code values on one line of a line screen, the present invention is not limited to the above-described embodiments. For example, identical codes may be embedded successively over plural lines in the slow-scanning direction.

Although, in the above-described first and second embodiments, images basically configured with line screens were used for description, of course, other screens such as dot screens may also be used.

The above-described first and second embodiments may also be applied to color images made up of plural planes (e.g., YMCK). In this case, coupling information may be embedded for all the planes or only for specific planes.

Although, in the above-described first and second embodiments, examples of application of the present invention to an electrophotographic image processing apparatus were described, the present invention is not limited to the above-described embodiments. It goes without saying that the present invention is applicable to any image processing apparatus that

becomes more suitable for maintaining the appearance of a hyper document.

To indicate the existence of links to users, a hyper document is usually generated making the attributes (colors of text and graphics frames, etc.) of image elements containing link information different from those of other image elements. Hence, the users browsing by a browser can determine implicitly whether a particular image element has a link embedded. Accordingly, also in the recording medium (a print) in the above-described embodiments, since information is embedded in a proper area (e.g., an upper-left portion within the image elements) in the vicinity of them, the user can presume areas in which a link is embedded. However, to more definitely designate areas in which information related to links is embedded, image elements within the areas, background colors, concentrations, or the like may be changed within a range in which the contents of the image elements can be visually checked.

[Fourth embodiment]

Next, a description will be made of a system that makes access to linked related information by using prints of a hyper document in which the coupling information as described in the first to third embodiments is embedded. FIG. 19 is a schematic diagram showing a system that makes access to linked related information by using prints of a hyper document in which coupling information is embedded.

In the figure, an the image formation apparatus 61 corresponds to one of the image processing apparatuses of the present invention, that is, the image processing apparatuses described in the first to third embodiments. Prints 62 correspond to image forming media, that is, recording media on which a hyper document has been printed out in the image formation apparatus 61.

Connected to the image formation apparatus 61 via a network 63 are a computer 64 such as a personal computer and a workstation; a WWW (World Wide Web) server 65; and an ID server 66 having the function of the link ID generation management unit 14. The network 63 is also connected to the Internet 67 of a global network, and a variety of apparatuses on the network 63 can communicate with external WWW servers.

A small-size scanner 68 is connected to each of the image formation apparatus 61 and the computer 64. The small-size scanner 68 reads out, from a hyper document printed out onto the prints 62, an image in an area in which coupling information based on link information or link ID is embedded. The light source of the small-size scanner 68 contains infrared light and the CCDs functioning as light receiving elements are also capable of receiving infrared light. Therefore, the prints 62 described in the first or second embodiment are scanned by the small-size scanner 68 to which an infrared light absorption filter is attached. The prints 62 onto which the two-dimensional codes described in the third embodiment are plotted with an infrared absorbent are scanned by the small-size scanner 68 to which an infrared permeable (visible light absorption) filter is attached.

The computer 64 to which such a small-size scanner 68 is connected analyzes an image scanned by the small-size scanner 68, detects link information or link ID contained in the image, and makes access to linked related information, based on the detection result. This function itself may be implemented using the prior art. The image formation apparatus 61 to which the small-size scanner 68 is connected also has this function, which allows the user to instantly print out related information without using the computer 64. Any of the small-size scanner 68 connected to the image formation apparatus 61 and the small-size scanner

68 connected to the computer 64 is provided with a button for selecting an output destination of related information so that an output destination (the image formation apparatus 61 or computer 64) of accessed related information can be selected according to the user's directions.

The WWW server 65 manages HTML document. The ID server 66 is used only when a link ID described in the second embodiment is used, to be more specific, when coupling information based the link ID is embedded for printing, and when linked related information is accessed using the print.

In a system thus configured, a description will be made of the outline of processing operations during access to linked related information by use of the print 62 of a hyper document in which coupling information is embedded.

First, a description will be made of access to linked related information from the print 62 described in the first or third embodiment. FIG. 20 is a flowchart showing the outline of processing operations in this case.

In this case, while following user operations, the small-size scanner 68 scans an area in which link information to information that the user wishes to access from the print 62 is embedded (S401). The image formation apparatus 61 or computer 64 connected with the small-size scanner 68 detects coupling information (digital codes) embedded in the area and obtains link information (S402).

On obtaining the link information, the image formation apparatus 61 or computer 64 judges whether directions are given from the user manipulating the small-size scanner 68, and if printout is directed (Yes in S403), access is made to the linked WWW server 65 or the like, based on

the obtained link information, to obtain related information (e.g., HTML document data) from the WWW server 65 or the like, and printout is made in the image formation apparatus 61 (S404). On the other hand, if output in the computer 64 is directed (No in S403), the image formation apparatus 61 or computer 64 displays related information obtained from the WWW server 65 or the like on a browser in the computer 64, or reproduces it by starting a supporting application (S405).

Next, a description will be made of the case of making access to linked related information from the prints 62 described in the second embodiment. FIG. 21 is a flowchart giving the outline of processing operations in this case.

Also in this case, embedding areas are scanned by the small-size scan 68 as in the above-described case (S501). During scanning by the small-size scanner 68, the image formation apparatus 61 or computer 64 connected with the small-size scanner 68 detects coupling information (digital codes) embedded in a relevant area and obtains a link ID (S502).

On obtaining the link ID, the image formation apparatus 61 or computer 64 communicates with the link ID generation management unit 14 of the ID server 66 and obtains link information corresponding to the obtained link ID (S503). If printout is directed from the user manipulating the small-size scanner 68 (Yes in S504), access is made to the linked WWW server 65 or the like, based on the obtained link information, to obtain related information (e.g., HTML document data) from the WWW server 65 or the like, and printout is made in the image formation apparatus 61 (S505). On the other hand, if output in the computer 64 is directed (No in S504), related information obtained from the WWW server 65 or the like is displayed on a browser in the computer 64, or is reproduced by starting a

supporting application (S506).

The right of access to a link destination depends on the setting of the linked WWW server 65 or the like independently of the spirit of the present invention. Therefore, a detailed description thereof is omitted.

As has been described above, according to an image processing apparatus or an image forming medium of the present invention, since coupling information for specifying related information related to an image element is embedded to be superimposed over at least part of the image element, the appearance of the image does not collapse or the amount of collapse is minimized. By analyzing coupling information of the image element or its vicinity, related information related to the image element can be accessed.

What Is Claimed Is:

1. An image processing apparatus, comprising:
an input part that inputs document data and coupling information for specifying related information related to an image element constituting a document image; and
an embedding part that embeds the coupling information to be superimposed over at least part of the image element to form the document image of the document data inputted by the input part.
2. The image processing apparatus according to claim 1, wherein the document data contains appearance information that defines the image formation positions of the image element on the document image, and the embedding part performs embedding based on the appearance information.
3. The image processing apparatus according to claim 1, wherein the coupling information indicates a location of the related information.
4. The image processing apparatus according to claim 1, wherein the coupling information specifies information indicative of a location of the related information.
5. The image processing apparatus according to claim 1, wherein the coupling information specifies the related information itself.
6. The image processing apparatus according to claim 1, wherein the embedding part embeds the coupling information in a form or color in which the coupling information is difficult to identify visually.
7. An image forming medium on which an image constituted by an image element is formed, wherein coupling information for specifying related information related to the image element is superimposed over at least part of the image element.

[illegible][illegible]

FIG.1

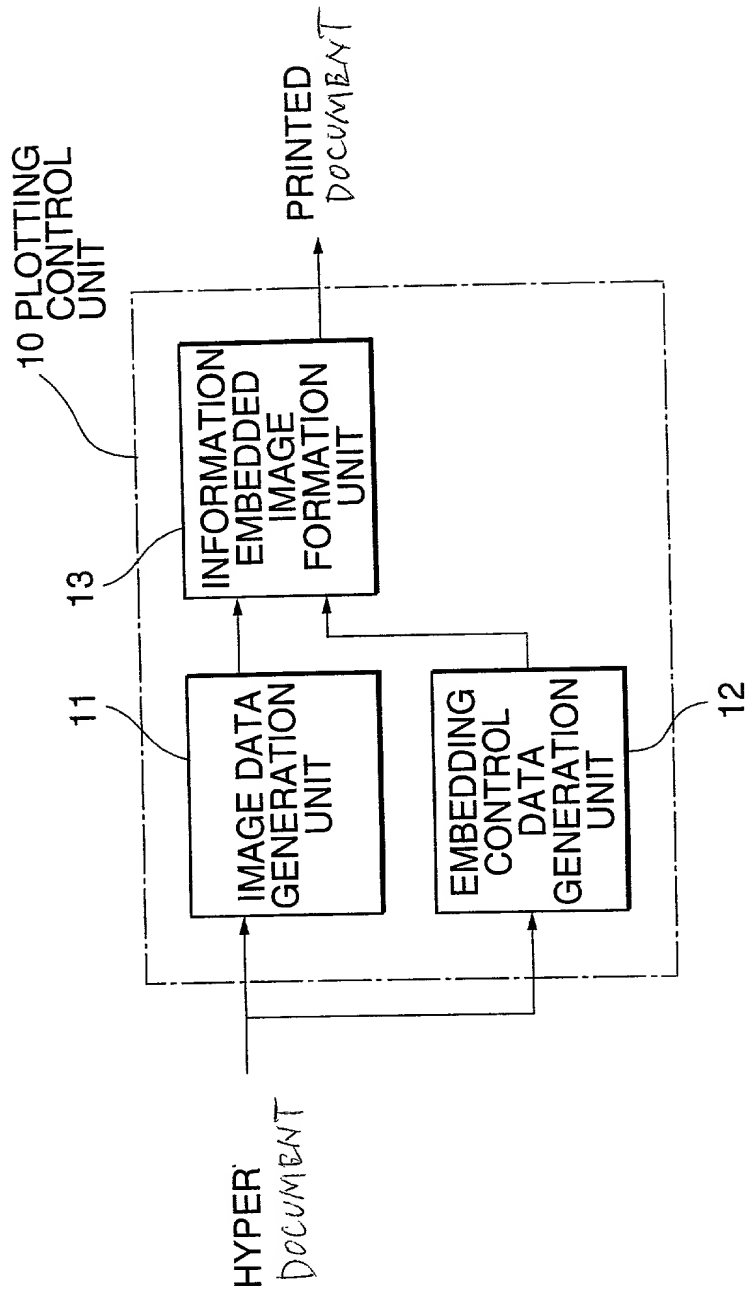


FIG.2A

21

23

X THE DOCUMENT COMPANY FUJI XEROX

富士ゼロックスホームページへようこそ
最終更新日：1999年〇月〇日
English Page

●紙と電子ドキュメントの融合による | ドキュメント・マネージメント |

2000年問題への対応 ドキュメント・ハンドリング ネットワーク・サービス・ソフトウェア 高速スキャナ・搭載のデジタル・複合機 | Docu Centre |

商品サービス ソフトウェア | Docu Works | Centre Ware | Docu Centre |

●商品一覧
●電子カタログPDF
●インターネット・ドキュメントサービス
●ダウンロード
●お問い合わせ

●ブランド・新、DocuPrint&DocuColor誕生

高速・高画質フルカラー リンター・コピー カラー情報満載 DocuColorで作成した
| Color Web | ○○プレゼント

DocuPrint & DocuColor Color Web 30 〇〇〇〇〇〇
Anniversary プレゼント

●会社情報

●会社紹介
●採用情報
●研究／開発
●環境への取り組み
●刊行物
●プレスリリース

What's Up

●~~緊急~~事のお知らせ | 99/19/30 |

●対話型英会話学習機 | Pocket Talking Coach |

ただ今、英会話上達キャンペーンを実施中 | 99/19/30 |

●国内で初めて、リサイクル調達ガイドラインを制定 | 99/19/2 |

●大型図面用複写機 (BrainTech8090a、BrainTech8030EC、2060) のご紹介、ただ今、Bigキャンペーンを実施中 | 99/19/30 |

●採用情報のページが新しくなりました。 | 99/19/22 |


●電子コンテンツ販売 | まんがの国 | 連載中の人気マンガのメニューを追加 | 99/19/19 |

●ENJOY COLORキャンペーン実施中：Jet Wind 500C/600Cをお買い上げの方全員にENJOY COLORGOODSをプレゼント | 99/19/22 |

ホームページについてのご意見・お問い合わせ

22

FIG.2B



THE DOCUMENT COMPANY
FUJIXEROX

富士ゼロックスホームページへようこそ
最終更新日：1999年〇月〇日
English Page

2000年問題への対応




商品サービス

- 商品一覧
- 電子カタログPDF
- インターネット・ドキュメントサービス
- ダウンロード
- お問い合わせ


会社情報

- 会社紹介
- 採用情報
- 研究／開発
- 環境への取り組み
- 刊行物
- プレスリリース

●紙と電子ドキュメントの融合による | ドキュメント・マネージメント |

ドキュメント・ハンドリング・ソフトウェア Docu Works	ネットワーク・サービス・ソフトウェア Centre Ware	高速スキャ・搭載のデジタル・複合機 Docu Centre
		

●ブランド・新、DocuPrint&DocuColor誕生

高速・高画質カラー・プリンター・ポスター DocuPrint & DocuColor	カラー情報満載 Color Web	DocuColorで作成した 〇〇プレゼント 
--	---------------------	--

What's Up

- 役員人事のお知らせ | 99/19/30 |
- 対話型英会話学習機 | Pocket Talking Coach |
ただ今、英会話上達キャンペーンを実施中 | 99/19/30 |
- 国内で初めて、リサイクル調達ガイドラインを制定 | 99/19/2 |
- 大型図面用複写機 (BrainTech8090a、BrainTech8030EC、2060) のご紹介、ただ今、Bigキャンペーンを実施中 | 99/19/30 |
- 採用情報のページが新しくなりました。 | 99/19/22 |
- 電子コンテンツ販売 | まんがの国 | 連載中の人気マンガのメニューを追加 | 99/19/19 |
- ENJOY COLORキャンペーン実施中：Jet Wind 500C/600Cをお買い上げの方全員にENJOY COLORGOODSをプレゼント | 99/19/22 |

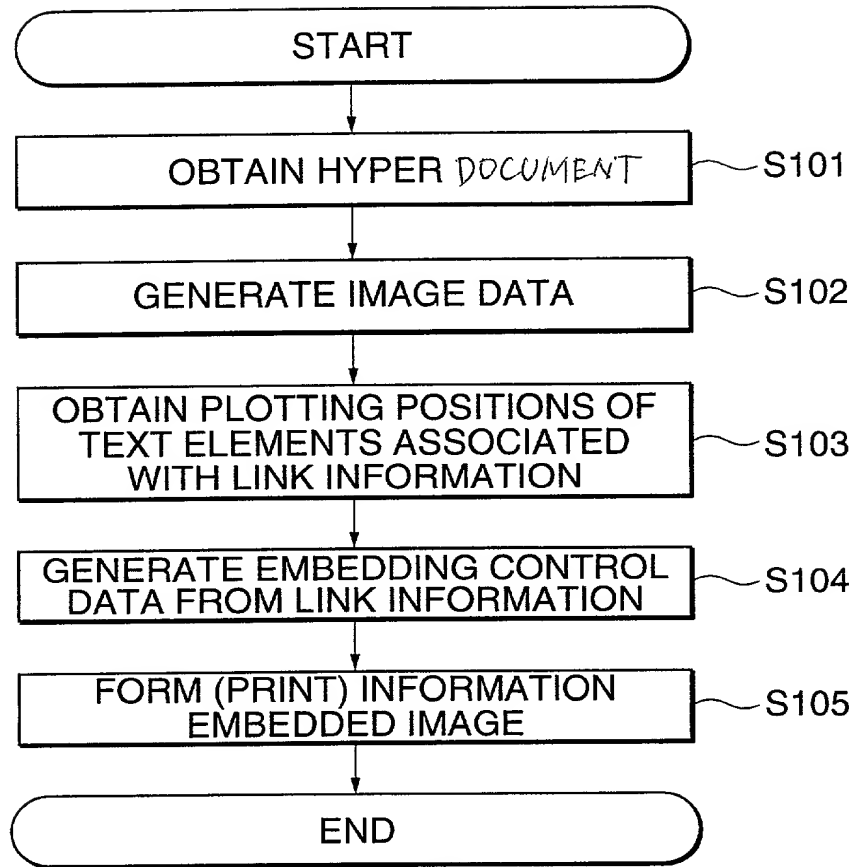
FIG.3

FIG.4A

(x,y)	LINK INFORMATION
(81,204)	product/2000
(723,409)	http://centware.fujixerox.co.jp/
(434,1229)	release/990921.html

FIG.4B

(x,y)	LINK INFORMATION (ABSOLUTE PATH)
(81,204)	http://www.fujixerox.co.jp/product/2000
(723,409)	http://centware.fujixerox.co.jp/
(434,1229)	http://www.fujixerox.co.jp/release/990921.html

FIG.6

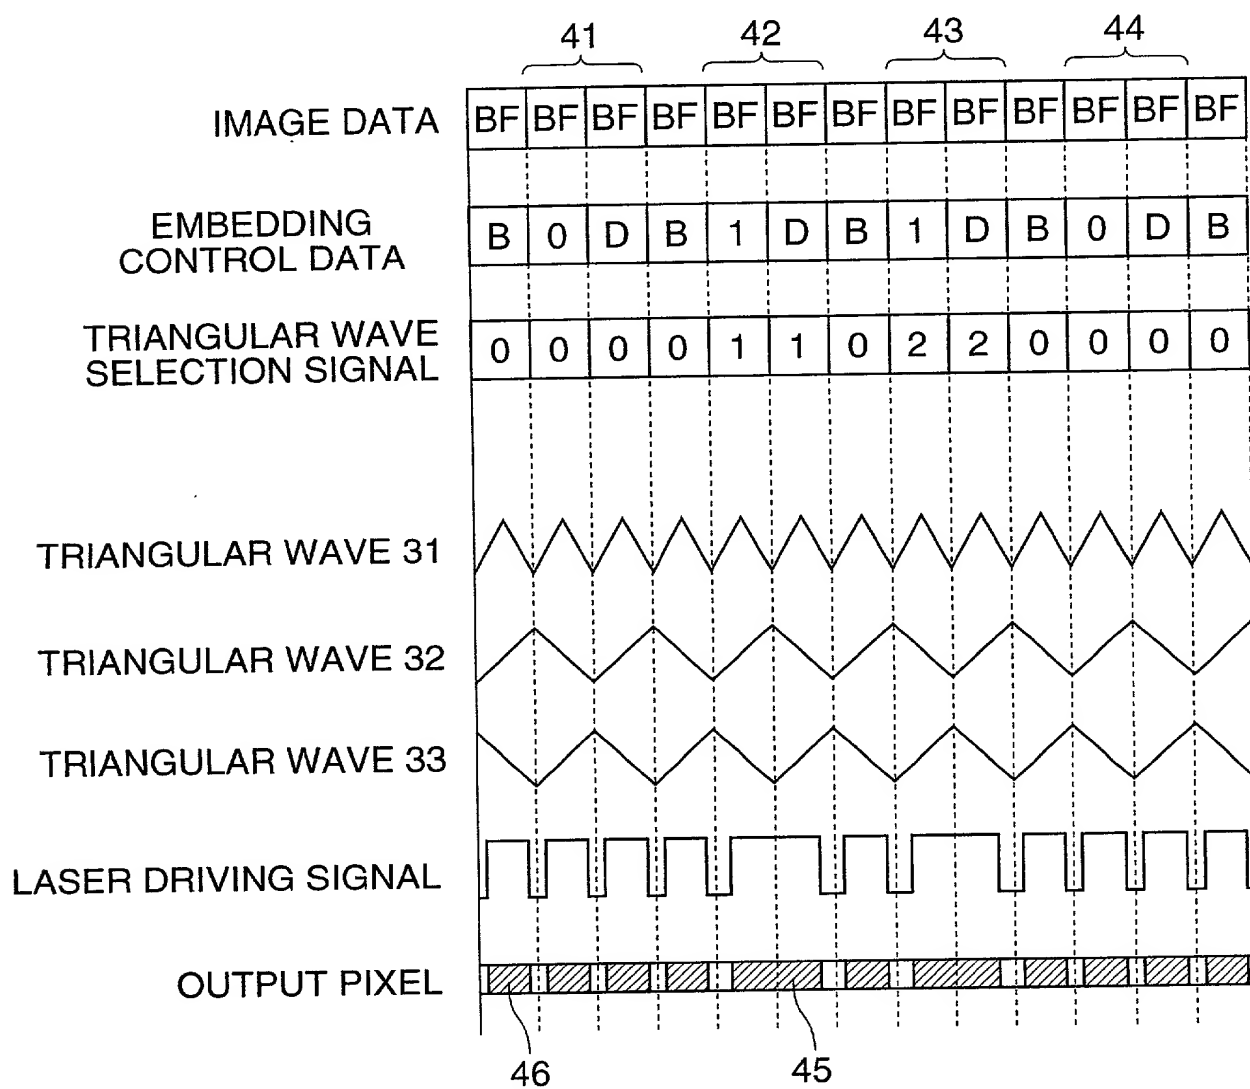


FIG.7

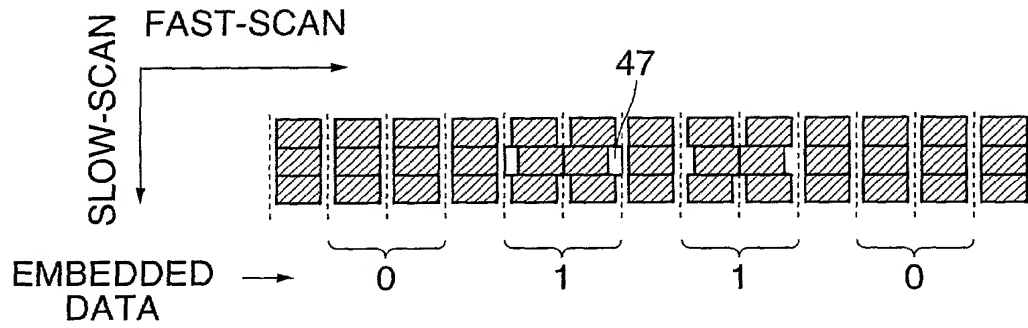


FIG.8

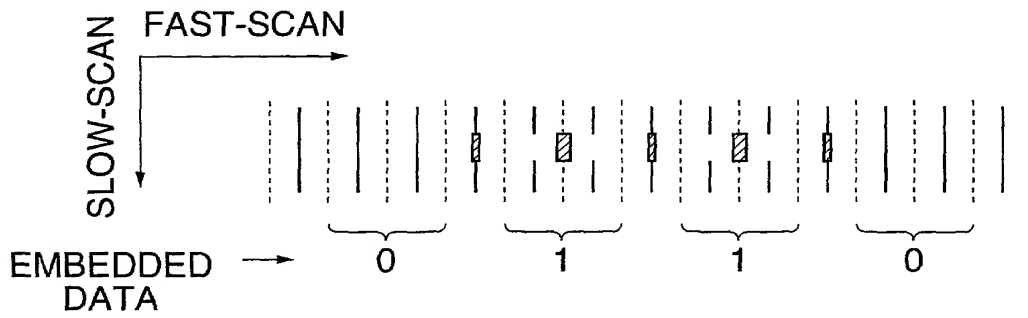
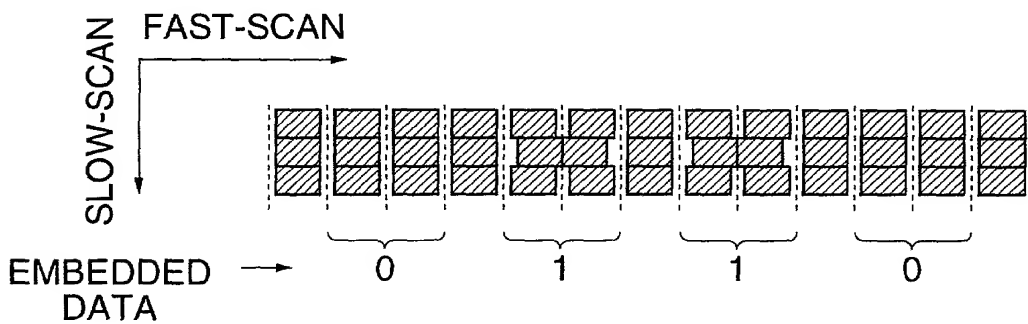


FIG.9



007E20"49462960

[illegible]

FIG. 11

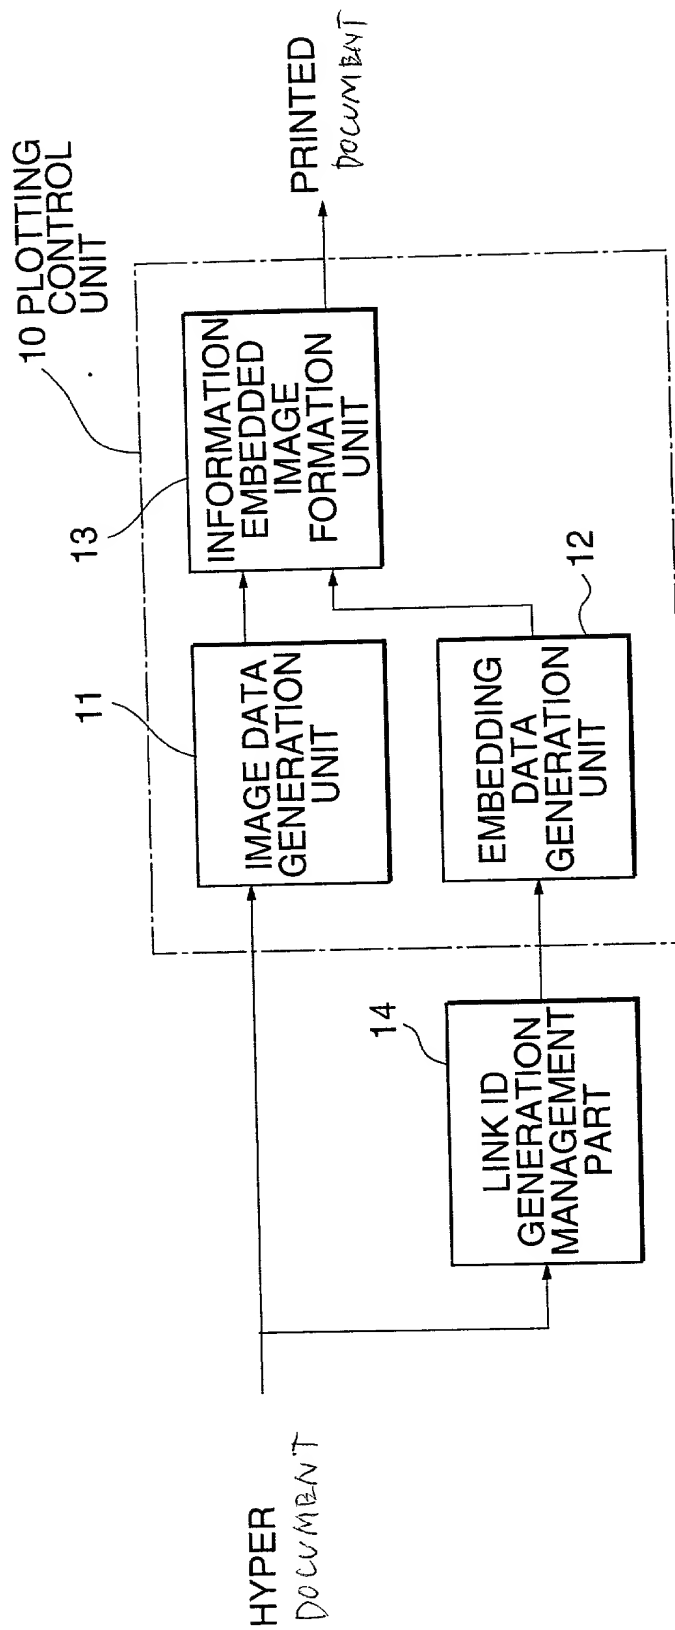


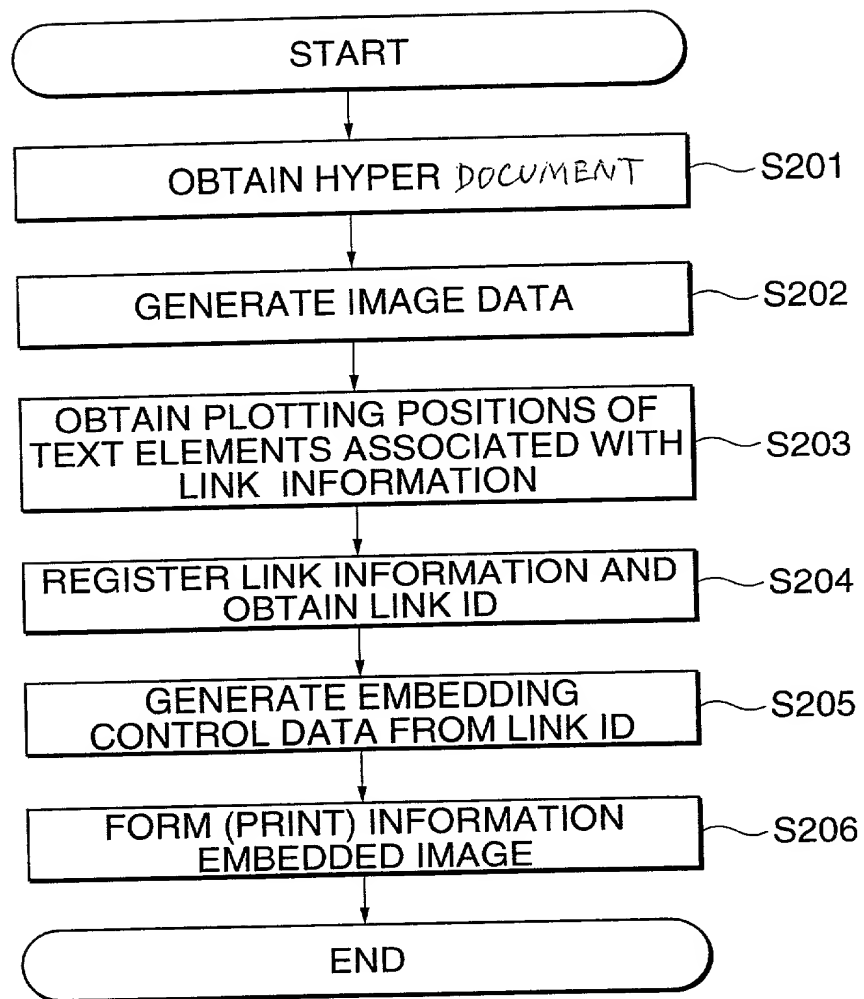
FIG.12

FIG.13A

(x,y)	LINK INFORMATION
(81,204)	product/2000
(723,409)	http://centware.fujixerox.co.jp/
(434,1229)	release/990921.html

FIG.13B

LINK ID (HEXADECIMAL)	LINK INFORMATION (ABSOLUTE PATH)
81F948013450AE1300000001	http://www.fujixerox.co.jp/product/2000
81F948013450AE1300000002	http://centware.fujixerox.co.jp/
81F948013450AE2B00000001	http://www.fujixerox.co.jp/release/990921.html

FIG.13C

(x,y)	DATA TO BE EMBEDDED (LINK ID)
(81,204)	81F948013450AE1300000001
(723,409)	81F948013450AE1300000002
(434,1229)	81F948013450AE2B00000001

FIG.14

51

X THE DOCUMENT COMPANY FUJI XEROX

富士ゼロックスホームページへようこそ
最終更新日：1999年〇月〇日
[English Page](#)

2000年問題への対応 ●紙と電子ドキュメントの融合による「ドキュメント・マネージメント」
ドキュメント・ハント・リング・ ネットワーク・サービス・ソフトウェア 高速・高画質・搭載のデジタル・

●商品・サービス ●商品一覧 ●電子カタログPDF ●インターネット・ドキュメントサービス ●ダウンロード ●お問い合わせ

ソフトウェア | Docu Works | Centre Ware | 複合機 | Docu Centre |

Docu Works Centre Ware Docu Centre

●ブランド・新、DocuPrint&DocuColor誕生

高速・高画質フルカラー リンク・ウェブ カラー情報満載 DocuColorで作成した

DocuPrint & DocuColor Color Web 30周年プレゼント

30th Anniversary

●会社情報 ●会社紹介 ●採用情報 ●研究／開発 ●環境への取り組み ●刊行物 ●プレスリリース

What's Up

●役員人事のお知らせ | 99/19/30 |

●対話型英会話学習機 | Pocket Talking Coach |

ただ今、英会話上達キャンペーンを実施中 | 99/19/30 |

●国内で初めて、リサイクル調達ガイドラインを制定 | 99/19/2 |

●大型図面用複写機 (BrainTech8090a、BrainTech8030EC、2060) のご紹介、ただ今、Bigキャンペーンを実施中 | 99/19/30 |

●採用情報のページが新しくなりました。 | 99/19/22 |

●電子コンテンツ販売 | まんがの国 | 連載中の人気マンガのメニューを追加 | 99/19/19 |

●ENJOY COLORキャンペーン実施中：Jet Wind 500C/600Cをお買い上げの方全員にENJOY COLORGOODSをプレゼント | 99/19/22 |

ホームページについてのご意見・お問い合わせ

53

52

FIG.15

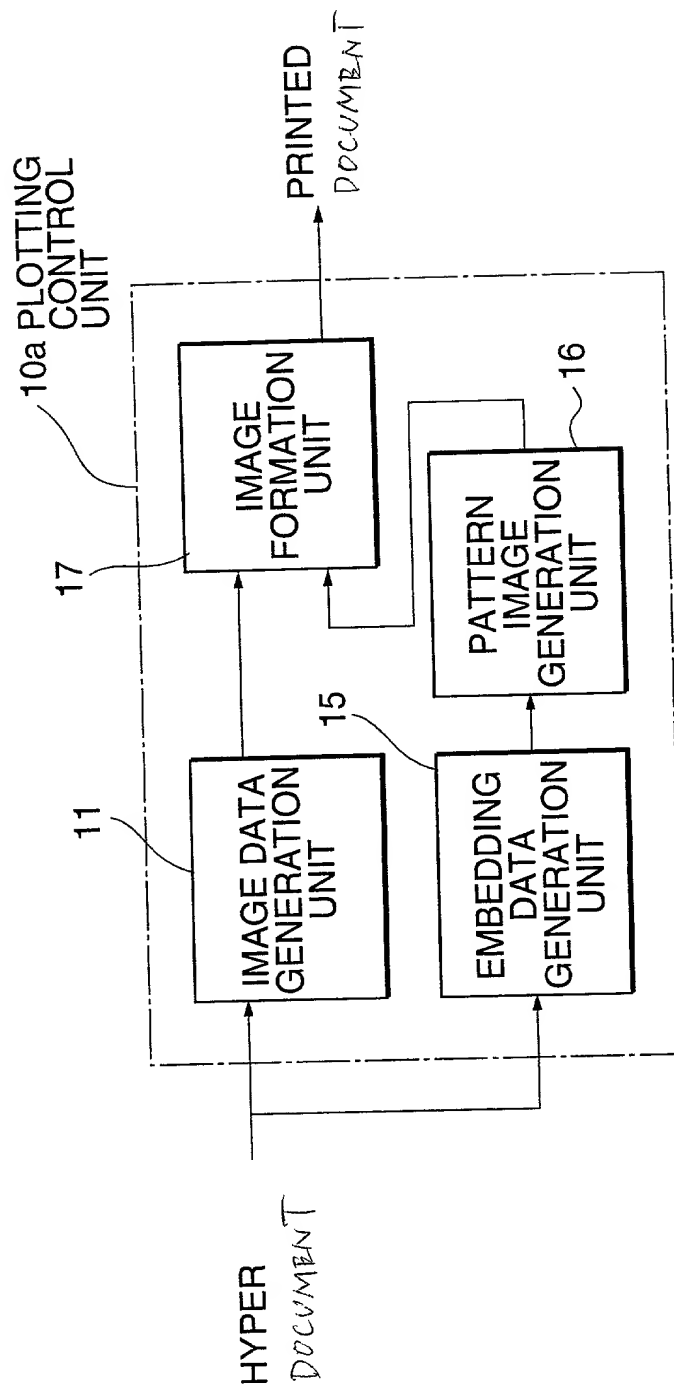


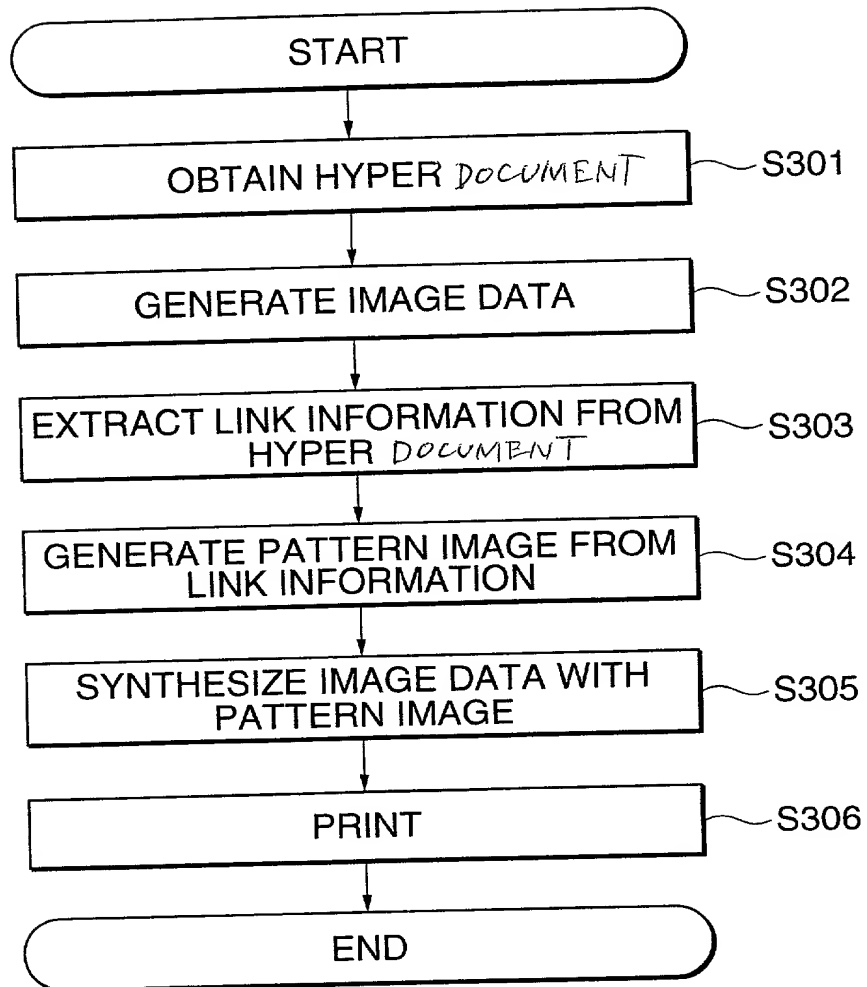
FIG.16

FIG.17

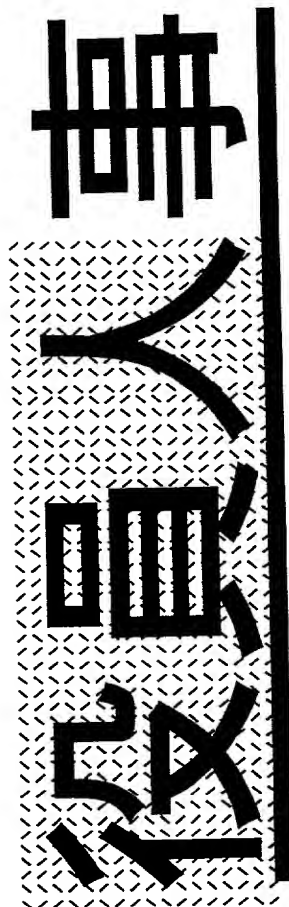


FIG.18

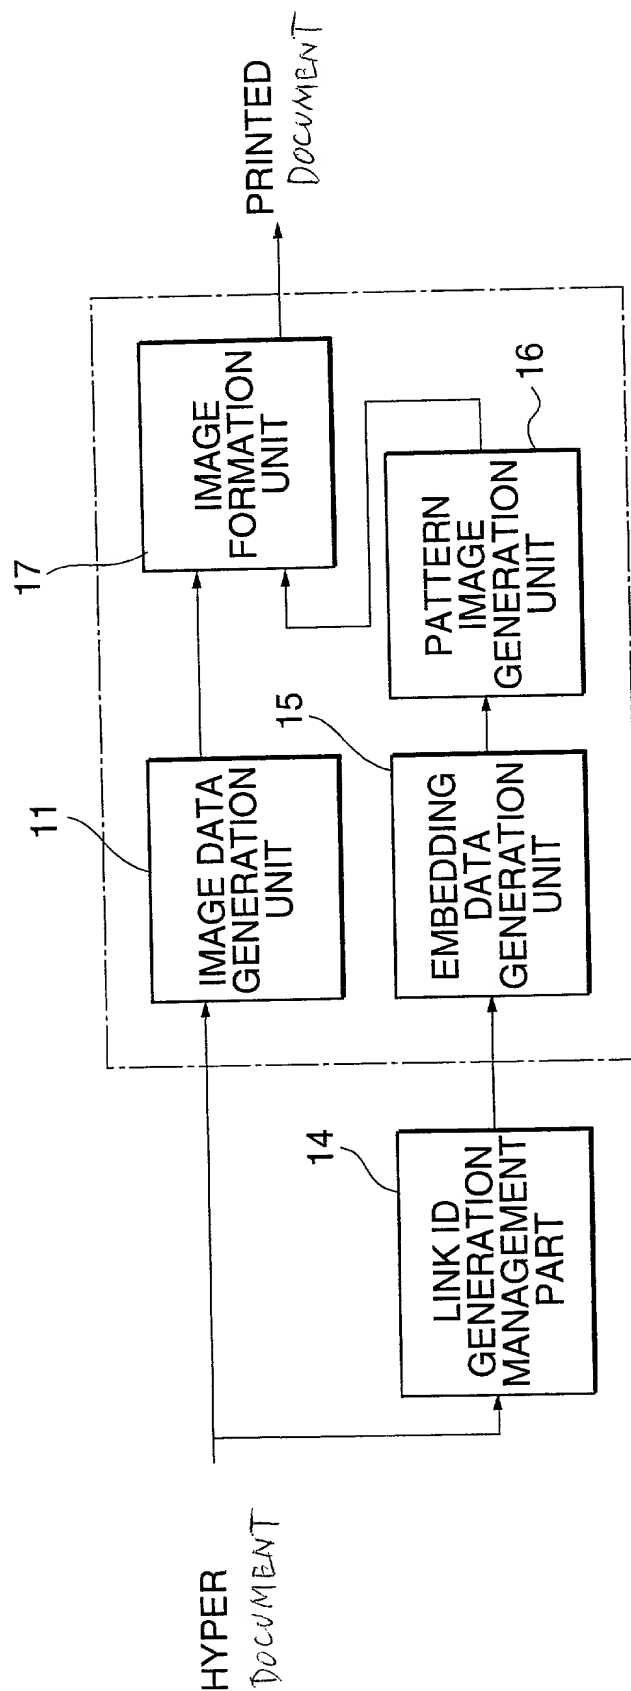


FIG. 19

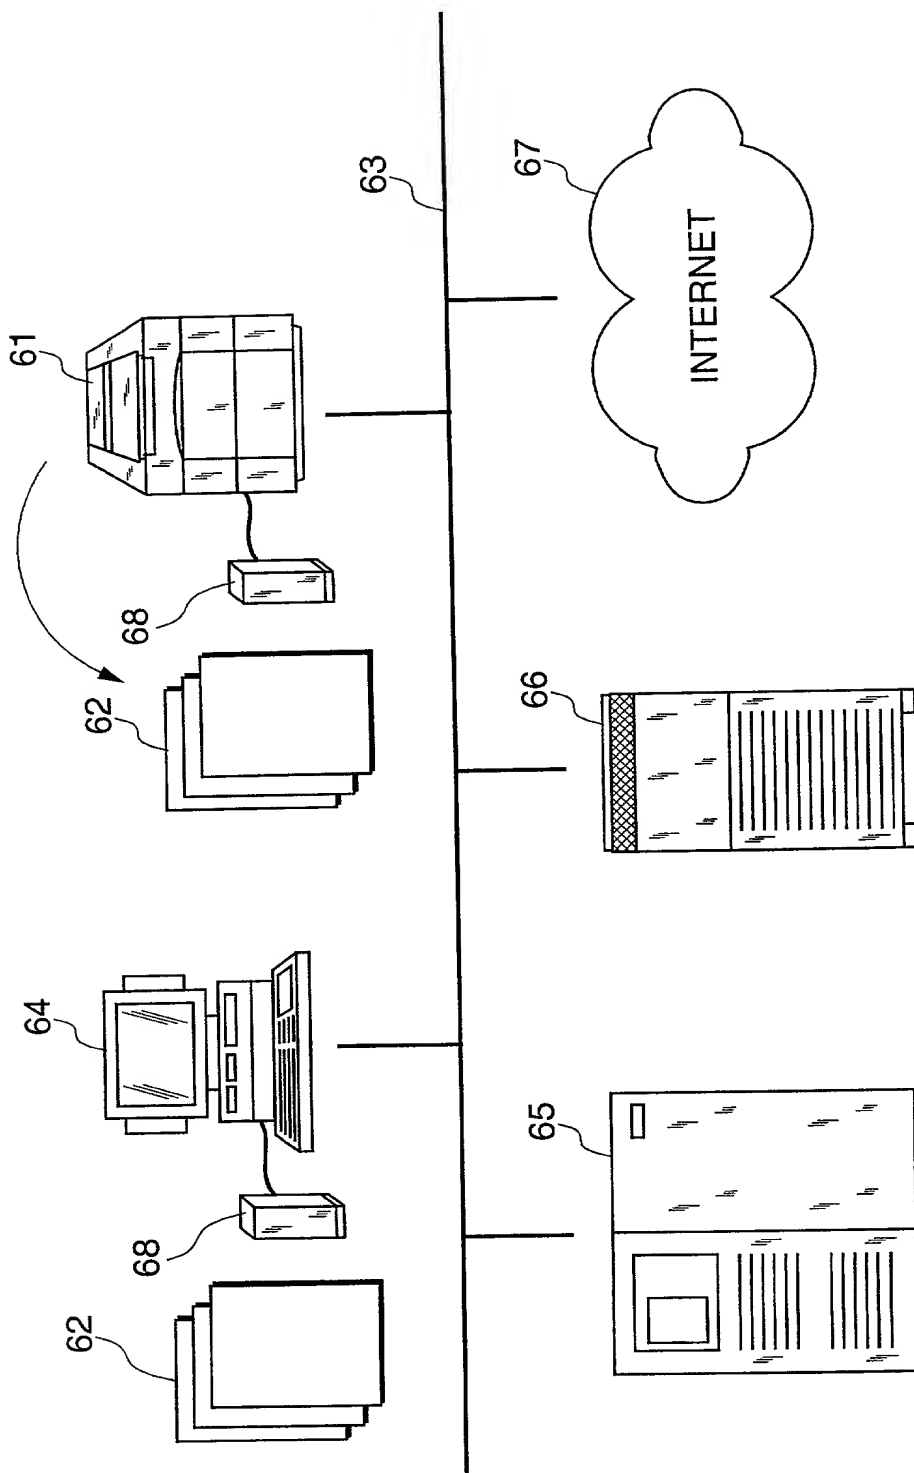
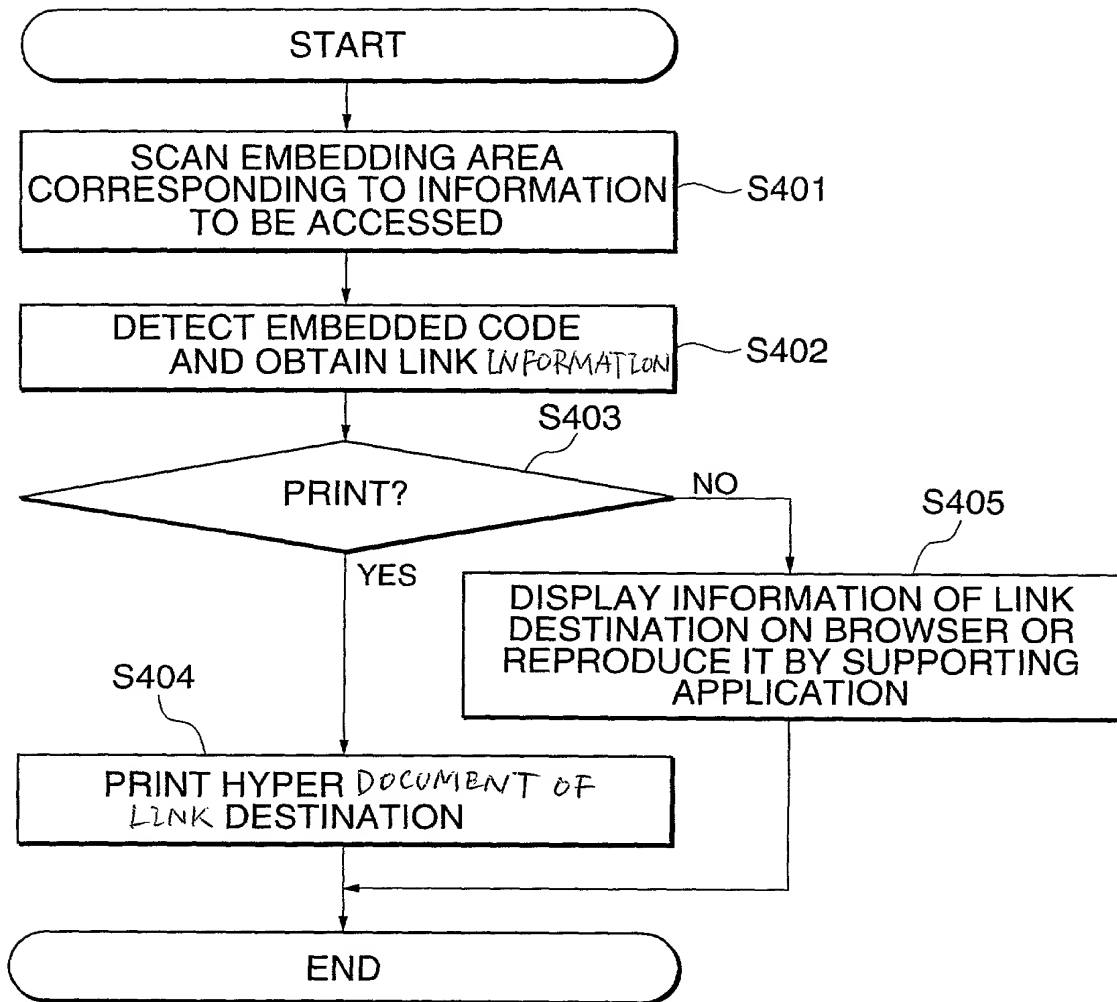


FIG.20

[illegible]

APPLICATION FOR UNITED STATES PATENT DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; that

I verily believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

IMAGE PROCESSING APPARATUS AND IMAGE FORMING MEDIUM

described and claimed in the specification:

Check one

*a. ☒ attached hereto.

b. ☐ filed on _____ as Application Serial No. _____ and
amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified application, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

Under Title 35 U.S. Code § 119, the priority benefits of the following foreign application(s) and/or United States provisional application(s) filed within one year prior to this application are hereby claimed:

Japanese Patent Application No. 11-356024, filed on December 15, 1999

The following application(s) for patent or inventor's certificate on this invention were filed in countries foreign to the United States of America either (a) more than one year prior to this application, or (b) before the filing date of the above-named foreign priority application(s) and/or United States provisional application(s):

As a named inventor, I hereby appoint the registered practitioners of Morgan, Lewis & Bockius LLP included in the Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to that Customer Number.

Customer Number: 009629

I hereby declare that I have reviewed and understand the contents of this Declaration, and that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Typewritten Full Name
of Sole or First inventor:

Hiroyuki		Sayuda
Given Name	Middle Initial	Family Name

**Inventor's Signature:

Hiroyuki Sayuda

**Date of Signature:

5/16/2000

Residence:

Ebina-shi	Kanagawa	Japan
City	State of Province	Country

Citizenship:

Japan

Post Office Address:

(Insert complete mailing
address, including country)

c/o Fuji Xerox Co., Ltd., 2274, Hongo,
Ebina-shi, Kanagawa, Japan

*This form may be executed only when attached to the specification (including claims) at the end thereof if Box a. is checked.

**Note to Inventor: Please sign name exactly as it appears above and insert the actual date of signing.

IF THERE IS MORE THAN ONE INVENTOR USE PAGE 2 AND PLACE AN "X" HERE ☐

009629 "49462360